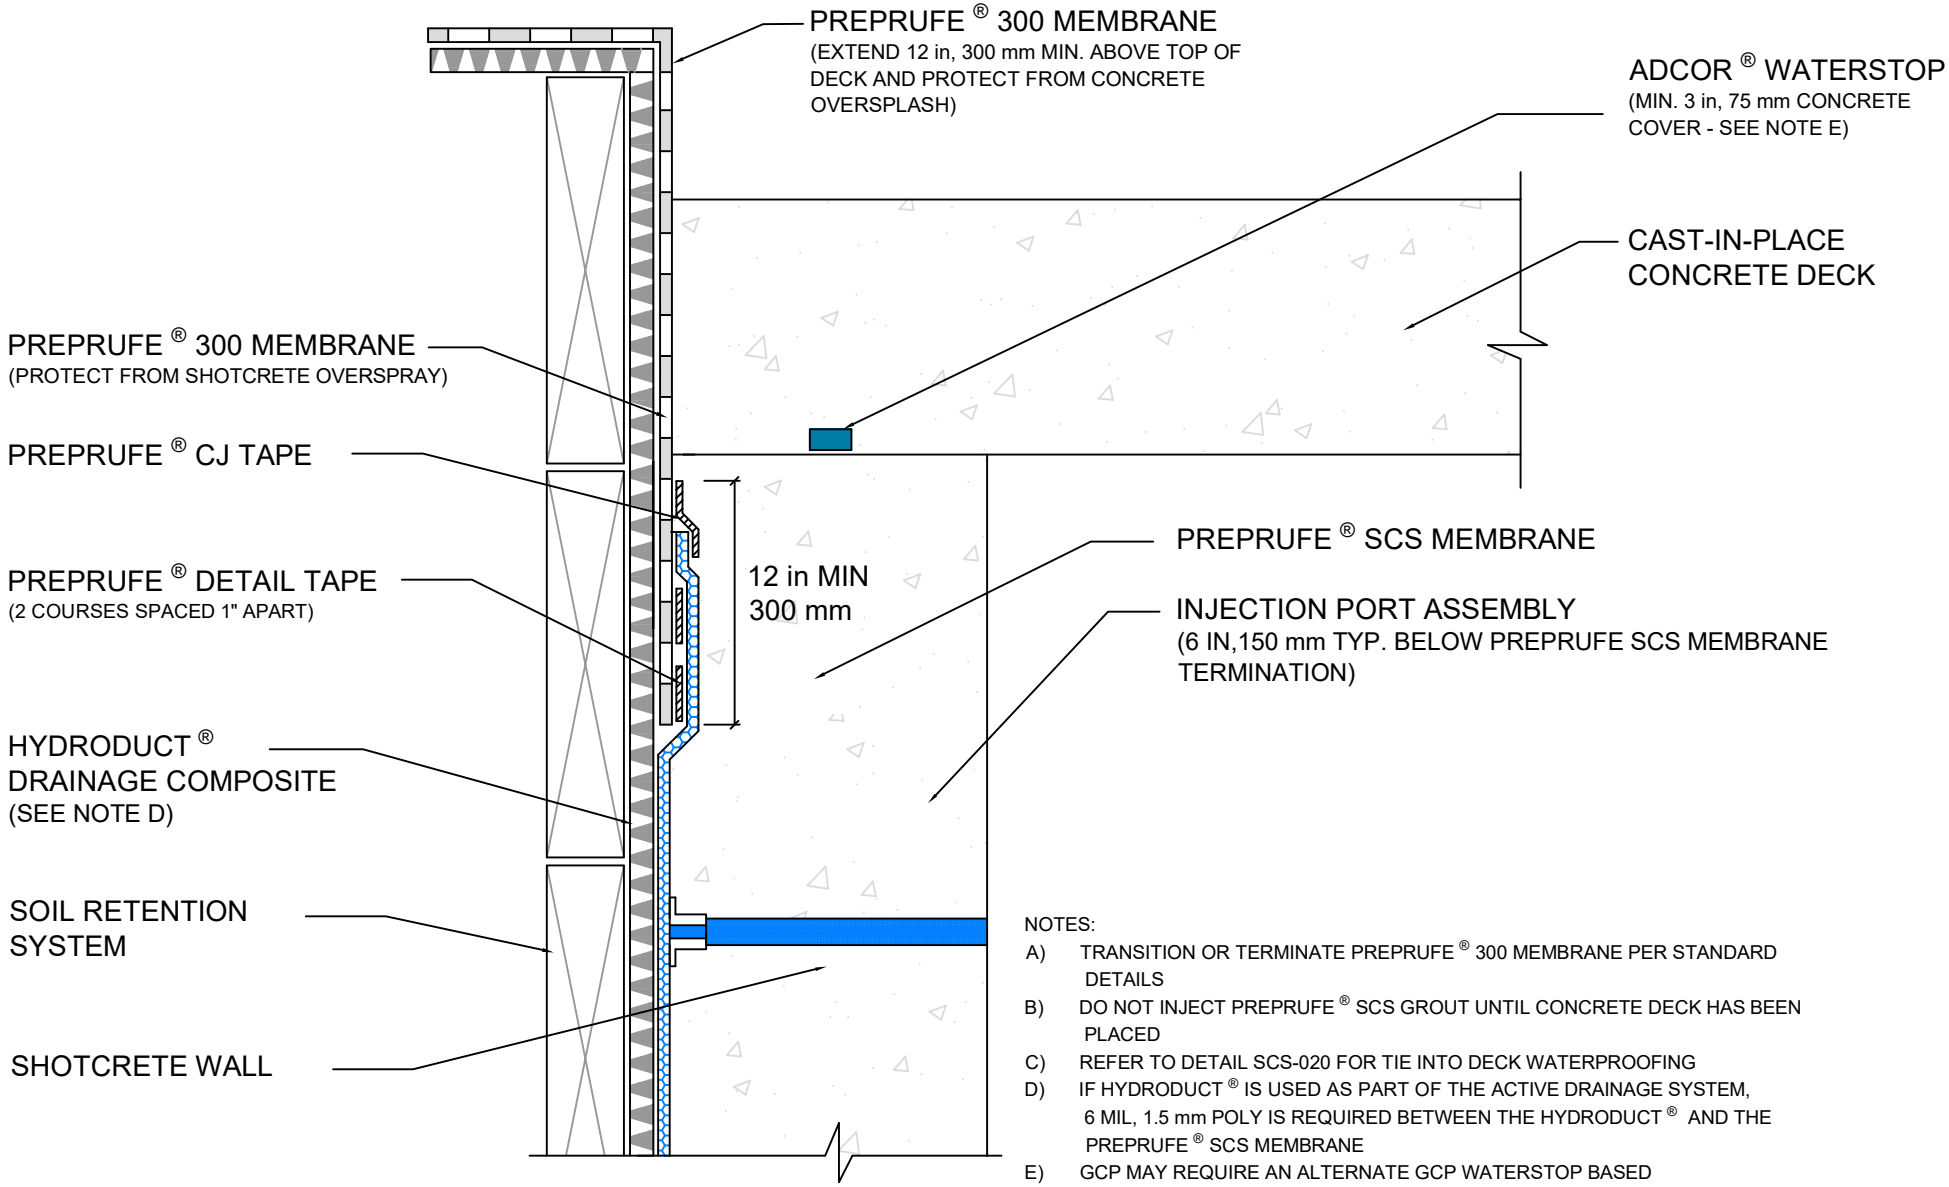

NOTES:

A) TRANSITION OR TERMINATE PREPRUFE ® 300 MEMBRANE PER STANDARD DETAILS

B) DO NOT INJECT PREPRUFE ® SCS GROUT UNTIL CONCRETE DECK HAS BEEN PLACED

C) REFER TO DETAIL SCS-020 FOR TIE INTO DECK WATERPROOFING

D) IF HYDRODUCT ® IS USED AS PART OF THE ACTIVE DRAINAGE SYSTEM, 6 MIL, 1.5 mm POLY IS REQUIRED BETWEEN THE HYDRODUCT ® AND THE PREPRUFE ® SCS MEMBRANE

E) GCP MAY REQUIRE AN ALTERNATE GCP WATERSTOP BASED ON DESIGN CONDITIONS

gcp applied technologies

TOP TERMINATION DETAIL - INACCESSIBLE

PREPRUFE ® SCS

WATERPROOFING SYSTEM FOR SHOTCRETE

DRAWING:	SCS 014
SCALE:	Not to scale
EFFECTIVE DATE:	08/21/2023
SUPERCEDES:	08/01/2016