


TIE-IN WITH VYCOR enV:

1. RIPCORD® HAS BEEN REMOVED AT SILL FOR EASE OF INSTALLATION AND/OR COORDINATION OF OTHER TRADES
2. INSTALL VYCOR PLUS HEAD FLASHING OVER VYCOR enV
3. APPLY VYCOR enV OR COMPATIBLE SEALANT TO TOP LEADING EDGE OF HEAD FLASHING

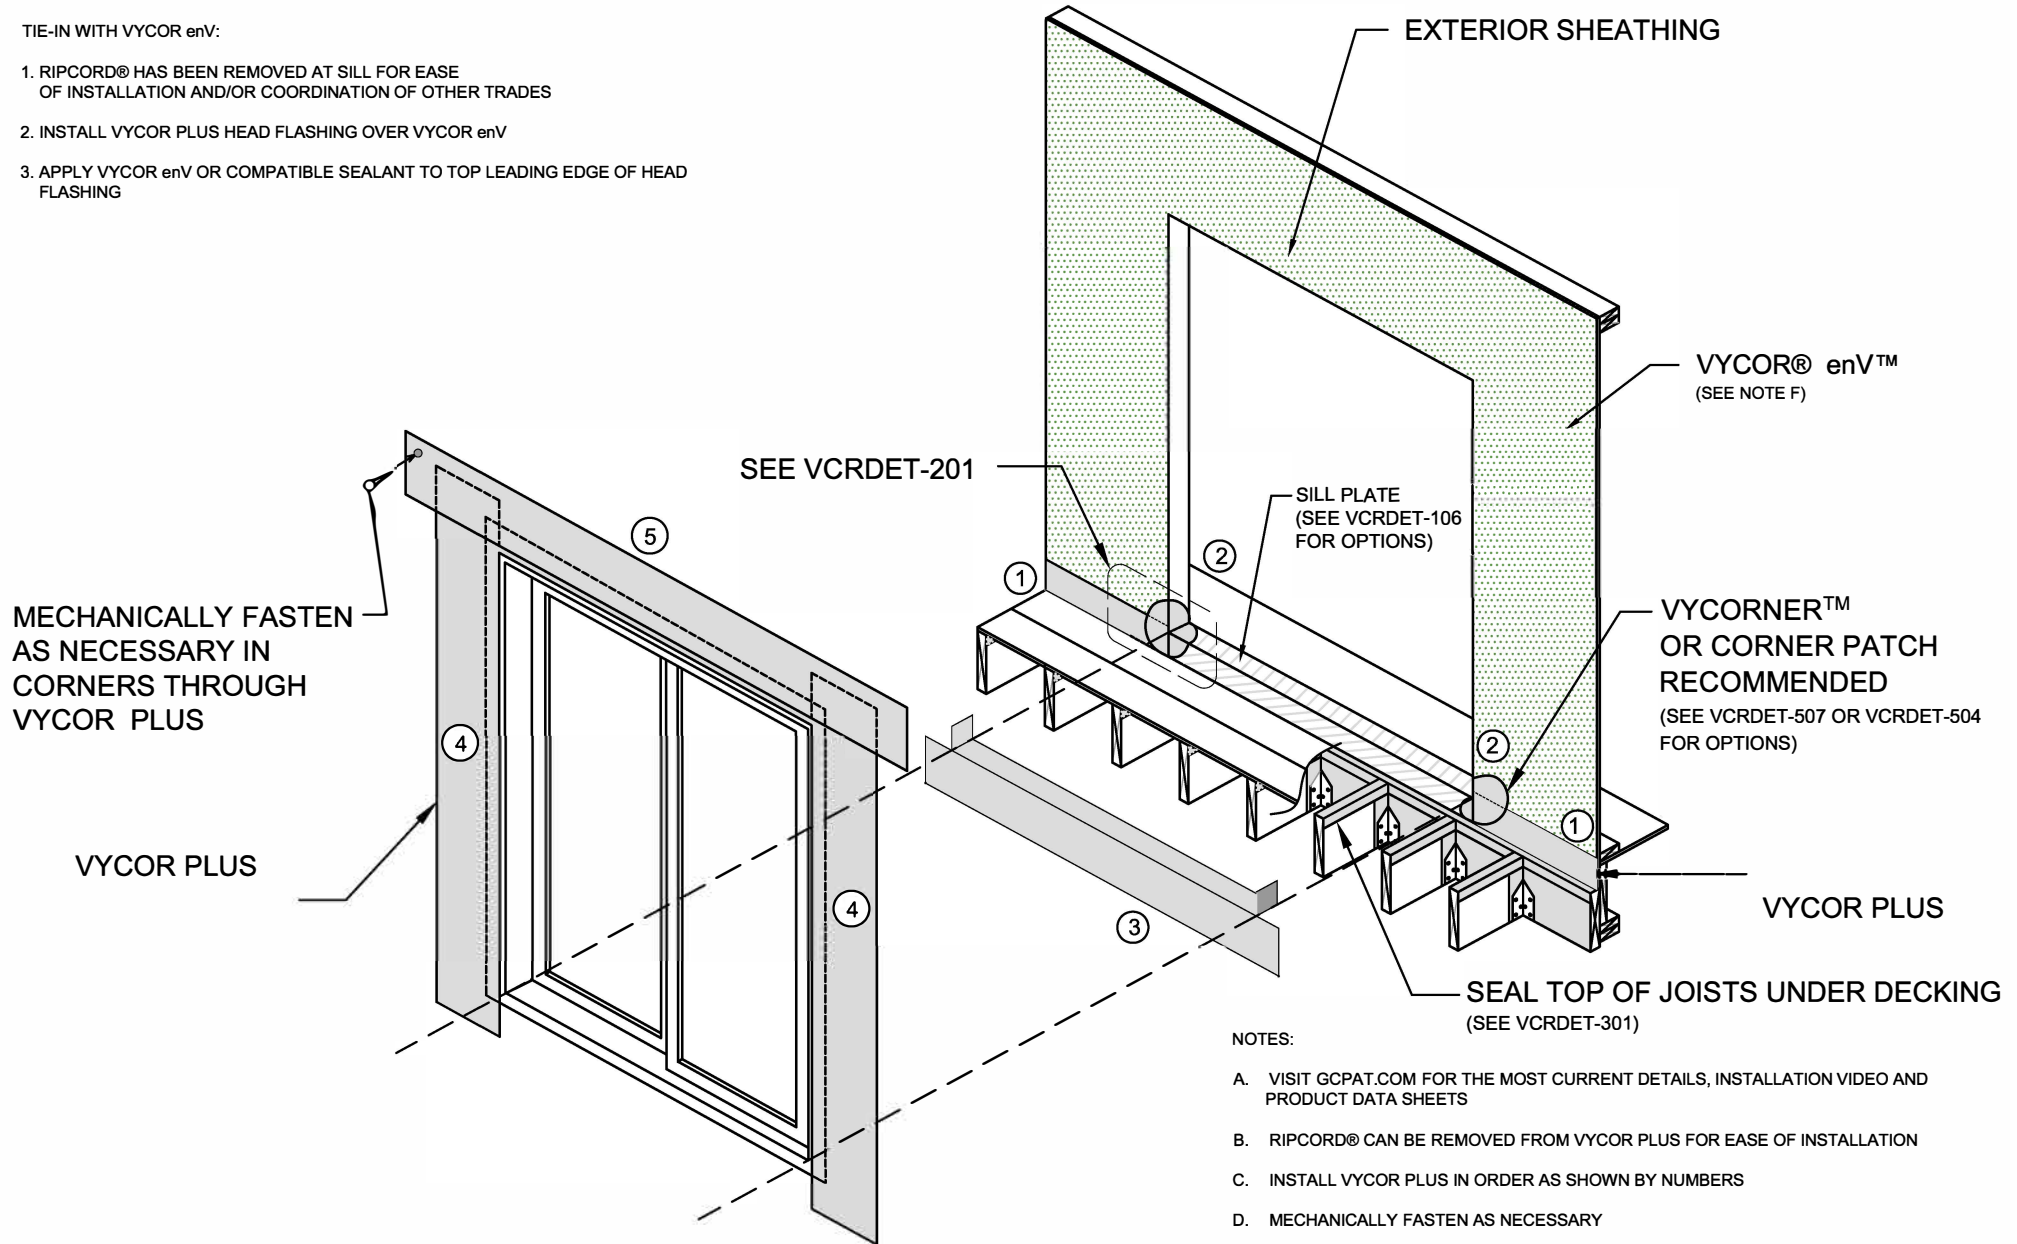

NOTES:

- A. VISIT GCPAT.COM FOR THE MOST CURRENT DETAILS, INSTALLATION VIDEO AND PRODUCT DATA SHEETS
- B. RIPCORD® CAN BE REMOVED FROM VYCOR PLUS FOR EASE OF INSTALLATION
- C. INSTALL VYCOR PLUS IN ORDER AS SHOWN BY NUMBERS
- D. MECHANICALLY FASTEN AS NECESSARY
- E. DETAIL ALSO RELEVANT FOR ALL VYCOR FLASHINGS
- F. REFER TO LOCAL BUILDING CODES FOR WEATHER RESISTIVE BARRIER REQUIREMENTS