



# BXUV.Y710

## Design/System/Construction/Assembly Usage Disclaimer

- Authorities Having Jurisdiction should be consulted in all cases as to the particular requirements covering the installation and use of UL Certified products, equipment, system, devices, and materials.
- Authorities Having Jurisdiction should be consulted before construction.
- Fire resistance assemblies and products are developed by the design submitter and have been investigated by UL for compliance with applicable requirements. The published information cannot always address every construction nuance encountered in the field.
- When field issues arise, it is recommended the first contact for assistance be the technical service staff provided by the product manufacturer noted for the design. Users of fire resistance assemblies are advised to consult the general Guide Information for each product category and each group of assemblies. The Guide Information includes specifics concerning alternate materials and alternate methods of construction.
- Only products which bear UL's Mark are considered Certified.

---

BXUV - Fire Resistance Ratings - ANSI/UL 263 Certified for United States

BXUV7 - Fire Resistance Ratings - CAN/ULC-S101 Certified for Canada

See General Information for Fire-resistance Ratings - ANSI/UL 263 Certified for United States  
Design Criteria and Allowable Variances


See General Information for Fire Resistance Ratings - CAN/ULC-S101 Certified for Canada  
Design Criteria and Allowable Variances

## Design No. Y710

February 05, 2014

**Ratings — 1, 1-1/2, 2, 3 and 4 Hr**

**\* Indicates such products shall bear the UL or cUL Certification Mark for jurisdictions employing the UL or cUL Certification (such as Canada), respectively.**

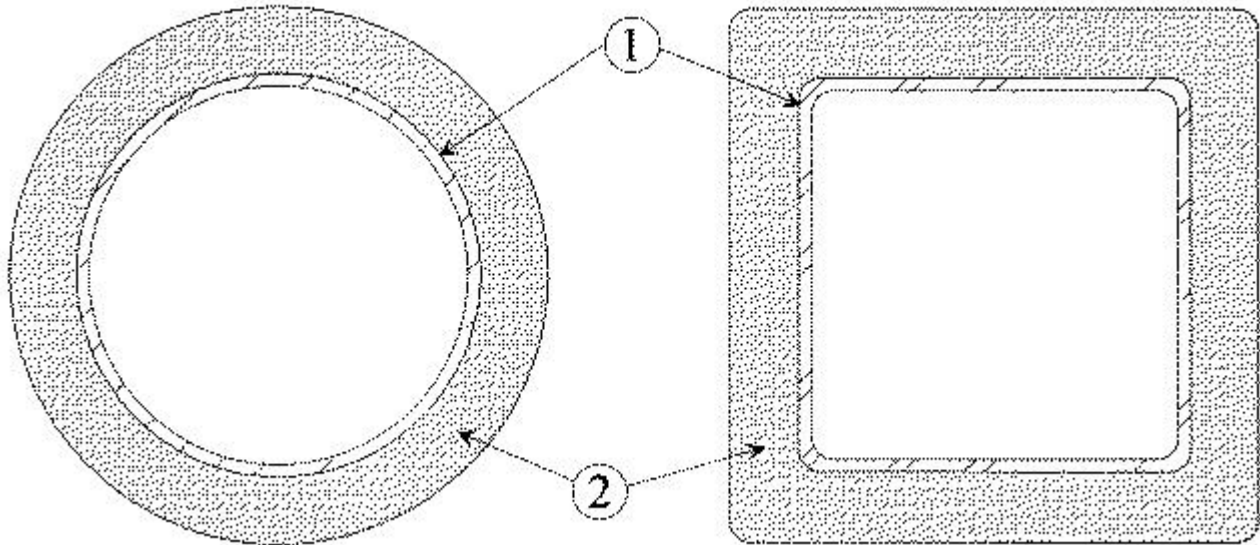

1. **Steel Pipe or Tube Column** — Steel circular pipe (SP) or steel square or rectangular tube (ST). The A/P ratio of the steel pipe or tube (see Item 2) shall range from 0.18 to 2.0.

2. **Spray-Applied Fire Resistive Materials\*** — Prepared by mixing with water according to instructions and applying in one or more coats to the thicknesses shown below, to steel surfaces which are clean and free of dirt, loose scale, and oil. Min avg and min ind density for Types MK-6/CBF, MK-6/ED, MK-6/HY, MK-6/HB, MK-6s, MK-6 GF, MK-6 GF Extended Set, MK-10 HB, MK-10 HB Extended Set, MK-1000/HB, MK-1000/HB Extended Set and RG of 15/14 pcf, respectively. Min avg and min ind density for Types Z-106, Z-106/G, Z-106/HY of 22/19 pcf, respectively.

Column Size In.	A/P	Min Thkns In.				
		1 Hr	1-1/2 Hr	2 Hr	3 Hr	4 Hr
ST 3x3x3/16	.18	1	1-11/16	2-5/16	3-9/16	NA
ST 3x3x5/16	.28	11/16	1-1/8	1-1/2	2-5/16	3-1/16
ST 3x3x1/2	.42	7/16	3/4	1	1-1/2	2-1/16
ST 8x8x5/8	.58	3/8	5/8	3/4	1-1/8	1-1/2
ST 20x20x3/4	.72	1/4	3/8	9/16	7/8	1-3/16
ST 20x20x1	.95	1/4	5/16	7/16	11/16	15/16
ST 32x32x1-1/4	1.20	1/4	1/4	3/8	9/16	3/4
ST 32x32x1-1/2	1.43	1/4	1/4	5/16	1/2	5/8
ST 32x32x1-3/4	1.65	1/4	1/4	1/4	7/16	9/16
ST 32x32x2	1.88	1/4	1/4	1/4	3/8	1/2
SP 3x.216	.20	15/16	1-1/2	2-1/16	3-1/8	NA
SP 8x.322	.31	5/8	1	1-5/16	2-1/16	2-13/16
SP 6x.432	.40	1/2	3/4	1	1-9/16	2-1/8
SP 10x.50	.48	3/8	5/8	7/8	1-3/8	1-13/16
SP 6x.864	.74	1/4	3/8	9/16	7/8	1-3/16

The hourly rating of the structural member is dependent upon the ratio of A/P and the thickness of Spray-Applied Fire Resistive Materials, where A is the cross sectional area of the pipe or tube and P is the heated perimeter.

The A/P ratio of a circular pipe is determined by:

$$A/P \text{ pipe} = \frac{t(d-t)}{d}$$

Where:

d = the outer diam of the pipe (in.)

t = the wall thickness of the pipe (in.)

The A/P ratio of a rectangular or square tube is determined by:

$$A/P \text{ tube} = \frac{t(a+b-2t)}{a+b}$$

Where:

a = the outer width of the tube (in.)

b = the outer length of the tube (in.)

t = the wall thickness of the tube (in.)

The thickness of Spray-Applied Fire Resistive Materials for rating of 3/4, 1, 1-1/2, 2, 3 and 4 h of a steel pipe or tube can be determined by the equation:

$$h = \frac{R-0.20}{4.43(A/P)}$$

Where:

R = the hourly rating (hrs)

h = the thickness of Spray-Applied Fire Resistive Materials, minimum 1/4 in., maximum 3-7/8 in.

**ARABIAN VERMICULITE INDUSTRIES** — Type MK-6GF, MK-6 GF Extended Set, MK-10 HB, MK-10 HB Extended Set, MK-1000/HB, MK-1000/HB Extended Set.

**GCP KOREA INC** — Types MK-6/CBF, MK-6/ED, MK-6/HY, MK-10 HB, MK-10 HB Extended Set, MK-6/HB, MK-6s, MK-6GF, MK-6 GF Extended Set, MK-1000/HB, MK-1000/HB Extended Set, Monokote Acoustic 1, Monokote Acoustic 5, Z-106, Z-106/G, Z-106/HY.

**GCP APPLIED TECHNOLOGIES INC** — Types MK-4, MK-5, MK-6/HY, MK-10 HB, MK-10 HB Extended Set, MK-6/HB, MK-6s, MK-6 GF, MK-6 GF Extended Set, MK-1000/HB, MK-1000/HB Extended Set, Monokote Acoustic 1, Monokote Acoustic 5, RG, Z-106, Z-106/G, Z-106/HY.

**\* Indicates such products shall bear the UL or cUL Certification Mark for jurisdictions employing the UL or cUL Certification (such as Canada), respectively.**

Last Updated on 2014-02-05

The appearance of a company's name or product in this database does not in itself assure that products so identified have been manufactured under UL's Follow-Up Service. Only those products bearing the UL Mark should be considered to be Certified and covered under UL's Follow-Up Service. Always look for the Mark on the product.

UL permits the reproduction of the material contained in the Online Certification Directory subject to the following conditions: 1. The Guide Information, Assemblies, Constructions, Designs, Systems, and/or Certifications (files) must be presented in their entirety and in a non-misleading manner, without any manipulation of the data (or drawings). 2. The statement "Reprinted from the Online Certifications Directory with permission from UL" must appear adjacent to the extracted material. In addition, the reprinted material must include a copyright notice in the following format: "© 2020 UL LLC"