
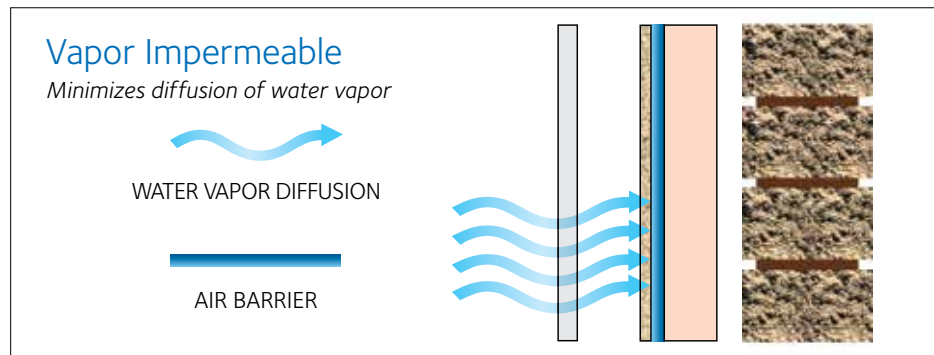



Vapor Permeable versus Vapor Impermeable

The choice of **vapor permeable** versus **vapor impermeable** depends on a range of factors, including climate conditions specific to your region, wall design, insulation placement and interior conditioning issues.

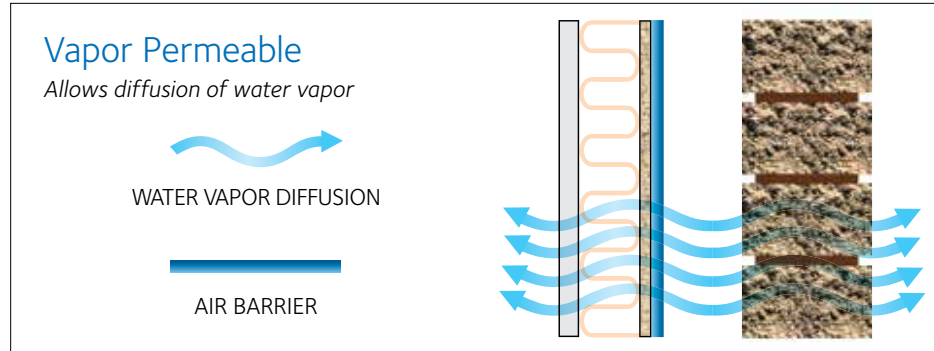

Sheet-applied versus Liquid-applied Membrane


PERM-A-BARRIER® membranes are available in **sheet applied** and **liquid applied** options. The choice depends on the application needs of the particular job

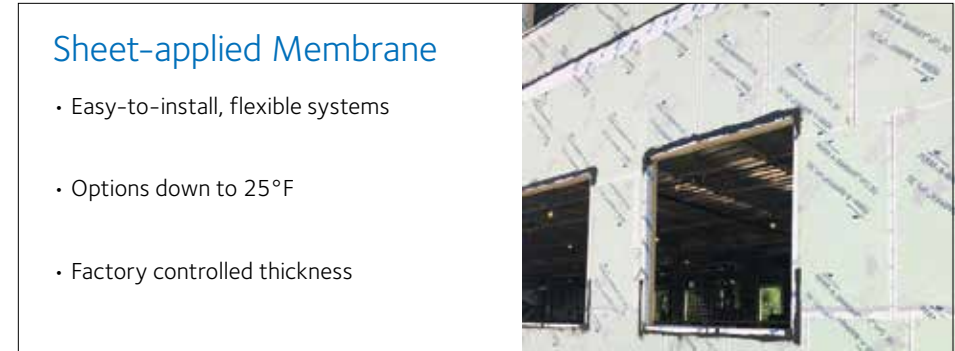

Sheet-applied Membrane

- Easy-to-install, flexible systems
- Options down to 25°F
- Factory controlled thickness

The image shows a close-up of a white sheet membrane being applied to a wall. The membrane has a grid pattern and is being installed around a window opening.

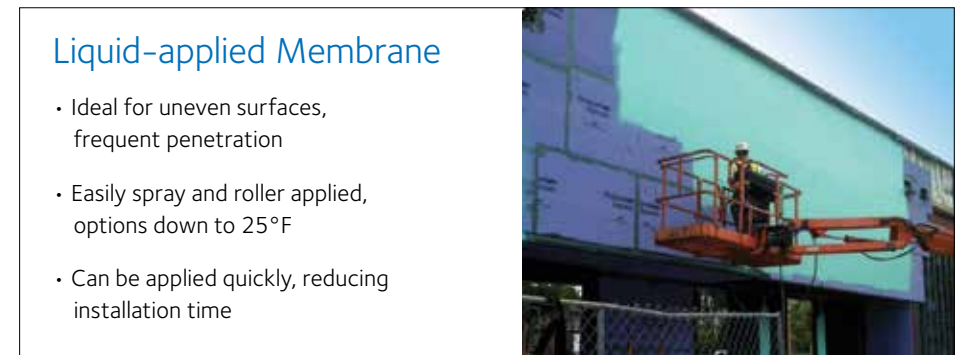

Liquid-applied Membrane

- Ideal for uneven surfaces, frequent penetration
- Easily spray and roller applied, options down to 25°F
- Can be applied quickly, reducing installation time

The image shows a worker on a scissor lift applying a green liquid membrane to the exterior wall of a building. The membrane is being applied in a smooth, continuous layer.

- **PROVEN GLOBAL TRACK RECORD**

Tens of thousands of installed jobs in every climate zone

- **COMPLETE PORTFOLIO**

Vapor permeable and impermeable sheet and fluid applied membranes

- **FULLY COMPATIBLE SYSTEMS**

Membrane, details, flashing, accessories, etc.

- **PRODUCTS TESTED TO THE MOST STRINGENT INDUSTRY STANDARDS**

(ASTM, ABAA, NFPA, etc.)

- **WORLD-CLASS TECHNICAL SUPPORT**

For customer service support, please call **866-333-3726**

PERM-A-BARRIER® Products

PRODUCT	MEMBRANE CATEGORY			DESCRIPTION	PACKAGING OPTIONS
	Permeability	Application	Fire Code		
PERM-A-BARRIER® Wall Membrane PERM-A-BARRIER® HT* Wall Membrane PERM-A-BARRIER® LT** Wall Membrane	Non-permeable	Sheet	Not 285***	Non-permeable, High-temperature or Low-temperature self-adhered wall membrane, for installations above 40°F. Maximum UV exposure of 60 days.	One roll of 3 ft. X 75 ft. (225 ft²) Two rolls of 18 in. X 75 ft. (225 ft²)
PERM-A-BARRIER® Al Wall Membrane PERM-A-BARRIER® LT** Al Wall Membrane	Non-permeable	Sheet	NFPA 285	Aluminum wall membrane. Maximum UV exposure of 1 year.	One roll of 3 ft. X 75 ft. (225 ft²)
PERM-A-BARRIER® NPS	Non-permeable	Sheet	NFPA 285	Primerless non permeable wall membrane. Apply above 25°F. Maximum UV exposure of 1 year.	One roll of 46 in. X 109 ft. (417 ft²). 400 ft² installed.
PERM-A-BARRIER® VPS 30	Permeable	Sheet	NFPA 285	Primerless, vapor-permeable wall membrane. Apply above 25°F. Maximum exposure of 270 days.	One roll of 38.4 in. X 141 ft. (450 ft²)
PERM-A-BARRIER® NPL 10 PERM-A-BARRIER® NPL 10 LT**	Non-permeable	Liquid	NFPA 285	One-component, non-permeable liquid. Maximum UV exposure of 90 days.	5 gal pail, 52 gal drum
PERM-A-BARRIER® VPL PERM-A-BARRIER® VPL LT**	Permeable	Liquid	NFPA 285	One-component, vapor-permeable liquid. Maximum UV exposure of 6 months.	5 gal pail, 52 gal drum
PERM-A-BARRIER® VPL 50RS UV Stable	Permeable	Liquid	NFPA 285	One-component, vapor-permeable, rain-resistant and easily sprayable liquid. Apply above 10°F. Maximum UV exposure of 12 months.	5 gal pail, 50 gal drum
PRODUCT	ACCESSORY CATEGORY			DESCRIPTION	PACKAGING OPTIONS
PERM-A-BARRIER® Aluminum Flashing	Flashing			Aluminum faced through wall flashing system. Do not expose to direct permanent sunlight. Cover within 1 year.	Two rolls of 18 in. X 75 ft (225 ft²) Six rolls of 12 in. X 50 ft. (300 ft²). Four rolls of 9 in. X 50 ft. (225 ft²). Six rolls of 6 in. X 50 ft. (300 ft²)
PERM-A-BARRIER® Wall Flashing	Flashing			Fully-adhered through wall flashing system. Maximum UV exposure of 60 days.	One roll of 36 in. X 75 ft. (225 ft²) One roll of 24 in. X 75 ft. (150 ft²) Two rolls of 18 in. X 75 foot (225 ft²) Three rolls of 12 in. X 75 ft. (225 ft²)
PERM-A-BARRIER® NPS Detail Membrane	Flashing			Primerless detail membrane, apply above 25°F. Maximum UV exposure of 1 year.	Two rolls of 18 in. X 109 ft (218 ft²) Twelve rolls of 6 in. X 109 ft. (654 ft²). Six rolls of 9 in. X 109 ft. (490 ft²). Six rolls of 12 in. X 109 ft. (654 ft²). Three rolls of 12 in. X 75 ft. (225 ft²)
PERM-A-BARRIER® Detail Membrane	Detail membrane			Fully-adhered detail membrane. Maximum UV exposure of 60 days.	Four rolls of 9 in. X 75 ft. (225 ft²) Six rolls of 6 in. X 75 ft. (225 ft²)
PERM-A-BARRIER® WB Primer	Primer / Adhesive			Water-based primer - non-permeable , green in color, use on any substrate.	One gallon pails packed 4 to a case 5 gallon pails
PERM-A-BARRIER® Adhesive Primer	Primer / Adhesive			Adhesive, low-temperature application, down to 20°F , green in color, use on any substrate.	5 gallon pails
BITUTHENE® B2 LVC Primer	Primer / Adhesive			Low VOC primer for CMU, green concrete and damp surfaces, brown in color.	5 gallon pails
PERM-A-BARRIER® S100	Sealant			One-part, ultra low modulus silicone sealant.	20 oz. sausage tubes, packed 12 to a case
PERM-A-BARRIER® Universal	Flashings & Sealant			One part moisture curing, STPE sealant for sealing penetrations, terminations, brick ties, final terminations & flashing application.	20 oz. sausage tubes, packed 12 to a case

* HT = High Temperature ; ** LT = Low Temperature ; *** NFPA 285 results are typical for most assemblies.

gcpat.com | North America Customer Service: 1-877-423-6491

GCP and PERM-A-BARRIER® are trademarks, which may be registered in the United States and/or other countries, of GCP Applied Technologies Inc. This trademark list has been compiled using available published information as of the publication date and may not accurately reflect current trademark ownership or status.

© Copyright 2022 GCP Applied Technologies Inc. All rights reserved. PAB-149-0922 BE0178

