


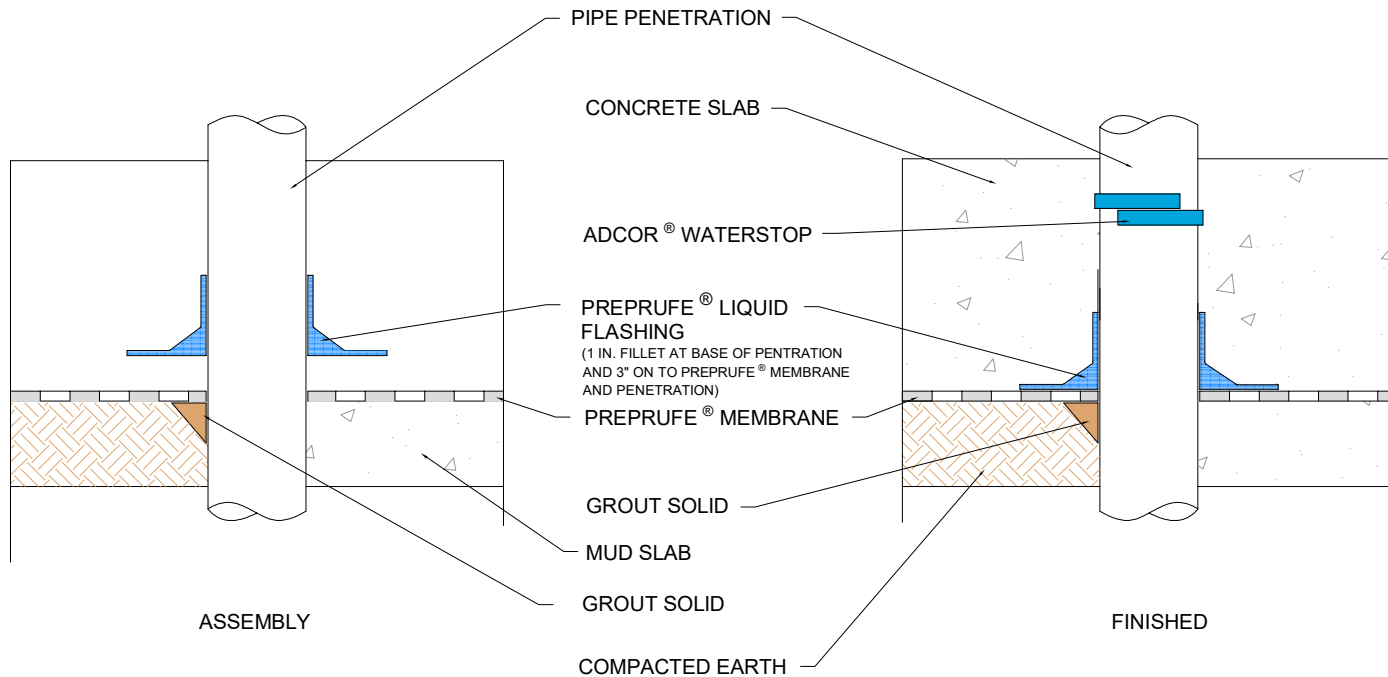

NOTES: ALL PENETRATIONS TO BE GROUTED SOLID IN PLACE.
A MINIMUM OF 6 IN. (150 mm) IS REQUIRED BETWEEN PENETRATIONS TO ENSURE PROPER DETAILING.
AVOID PLACEMENT OF MULTIPLE PENETRATIONS.


ADCOR[®] WATERSTOP


BITUTHENE[®] B2-LVC PRIMER
(ALL CONCRETE SURFACES)


PREPRUFE[®] LIQUID FLASHING
(1" FILLET MIN 3 in (75 mm) ONTO
VERTICAL AND HORIZONTAL)

PREPRUFE[®] 300 R PLUS
MEMBRANE

MUD SLAB
(OPTIONAL)

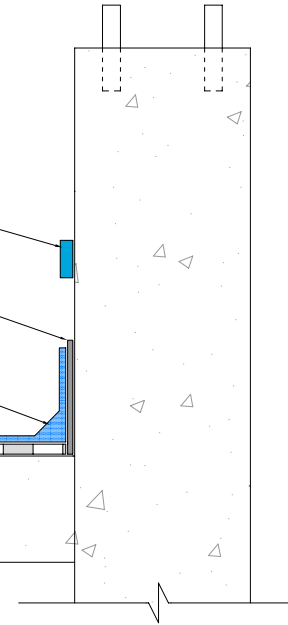

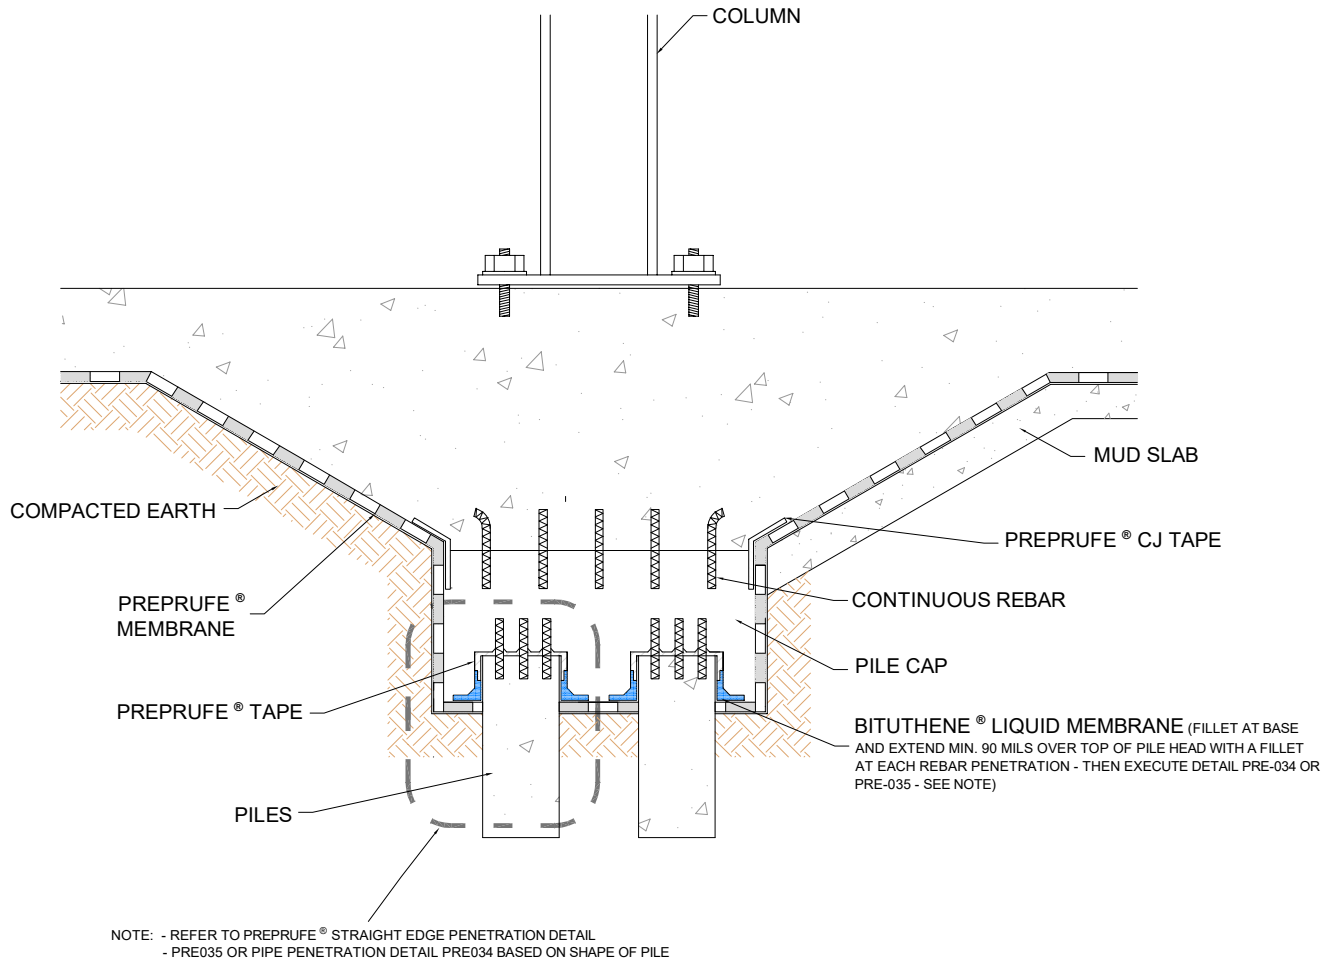

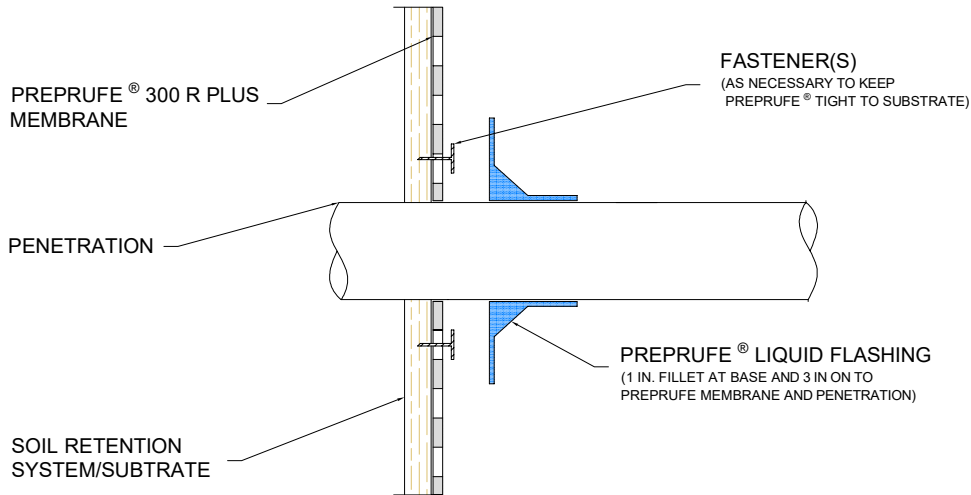

ASSEMBLY

