

Golden Bay Cement Plant Generates Energy Savings with CBA[®] Technology



Project	Golden Bay Cement Plant
Owner	The Golden Bay Cement Co. LTD
Cement Supplier	GCP Applied Technologies
GCP Solution	CBA [®] Technology

Project

In an increasingly challenging cement plant marketplace, the need to focus on manufacturing in an environmentally-friendly and cost-effective manner has become more and more critical, requiring innovative solutions.

Golden Bay Cement's Portland plant, located in northern New Zealand, represents an interesting case study in the cement and power industry's efforts to reduce costs and improve environmental performance in the cement manufacturing process. This cement plant, which supplies the New Zealand and South Pacific markets, has a production capacity of 500,000 tonnes per year. Cement is manufactured in a dry process GATX-Fuller conversion of a Vickers-designed kiln, a conversion, which was commissioned in 1983. Clinker is ground in three open-circuit mills.

"The Golden Bay Cement Plant experience is an interesting case in which a Quality Improver was used to reduce the Lime Saturation Factor while maintaining cement strength. This allowed the producers to reduce the ratio of high-grade limestone used and ultimately to lower production costs and energy consumption."



Golden Bay Cement Plant approached various cement additive suppliers to ascertain the applicability of their products to the identified strategy. In the end, the company decided to evaluate GCPs' Cement Quality Improver technologies.

In responding to customer requests over a number of years for cement with superior performance characteristics, Golden Bay Cement pursued a strategy of progressively higher lime saturation factors.

Typically, a raw mix of 75% cement rock and 25% high-grade limestone was needed to produce clinker giving the required performance. A consequence of this particular mix of raw materials is a relatively high silica ratio of 4:1.

The high silica ratio indicates the potential for difficulties in processing a raw mix of this chemistry. The consequent high fuel consumption presented a technical challenge to plant personnel, as they tried to meet power industry business expectations for lower energy consumption and reduced production costs.

After a thorough consideration of various options, the agreed strategy was to investigate modern cement additive technologies, which might allow enhancement of the performance of cement with a lower Lime Saturation Factor (LSF).

As part of the evaluation, both laboratory and plant trials were carried out by Golden Bay and GCP technical staff. This testing indicated that the CBA[®] line of quality improvers from GCP would be likely to provide the best strength enhancement of all the alternative additives evaluated.

The superior strength-enhancing properties of the CBA[®] type of Quality Improvers are linked to their ability to stay in the cement pore water over time, and to dissolve the ferrite phase in cement. The test of CBA[®] quality improvers indicated the possibility of using it to reduce the LSF of the clinker, potentially allowing the use of less costly raw materials, while still achieving higher strengths.

The cement produced during the Golden Bay Cement Plant trials showed an increase in mortar compressive strength (to AS/NZS 2350) from 58 MPa to 65 MPa. Parallel tests using a reference concrete mix showed an increase from 28-30 MPa to 32-34 MPa.


The final decision to use CBA[®] quality improvers was based on its demonstrated ability to deliver the required performance as well as to allow for future process enhancement.

The Final Results

Quality Improvers can provide an advantage to cement plants and the power industry. They can be used to produce a number of benefits, including: reduced mill retention time; increased substitution of clinker by limestone; increased cement production capacity for a given strength; increased flexibility in selection and handling of raw materials.

Reductions in greenhouse gas emissions and lower production costs were achieved by Golden Bay Cement Plant through the use of a CBA[®] Quality Improver from GCP. This enabled the cement plant to reduce the lime saturation factor in its clinker from 98 to 96 and then to 95 while maintaining cement strength. And in turn allowed for the increased use of a locally available, lower cost raw material and a reduction in clinkering temperature.

Related articles

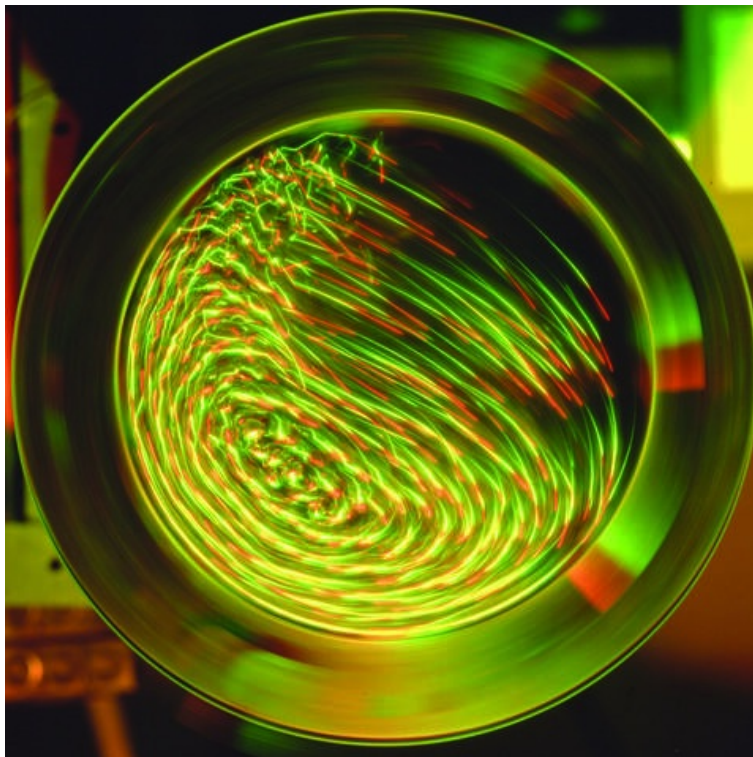

OPTEVA[®] CBA[®] Cement Additive



OPTEVA[®] TDA[®] Quality Improvers



TB-0703 — Recommended Procedures for Batching and Mixing FORCE 10,000D[®]
Concrete Technical Bulletin



TB-0801 — Cold Temperature Performance of POLARSET® Non-Chloride Accelerator Technical Bulletin

Cement Type	I 52.5R	I 52.5R	% change
Clinker %	95.0	95.0	
Gypsum %	5.0	5.0	
Chloride-based Quality Improver (kg/t)	1.300	—	
ESE 242 (kg/t)	—	0.37	
Blaine Fineness (cm ² /gram)	4331	4290	-0.95
Mill Output (t/h)	50	51.7	3.4%
Specific Consumption (kWh/t)	62	60.1	-3.06
W/C Ratio	0.50	0.50	
	Chloride Quality Improver	ESE 242	% change
Compressive Strength (MPa): EN 196/1 mortar			
1 Day	27.8	28.0	0.72
2 Days	41.4	44.1	6.52
28 Days	68.1	73.5	7.93

TB-0802 — Non corrosive properties of POLARSET® Non-Chloride Accelerator Technical Bulletin

gcpat.com | North America Customer Service: 1 877-4AD-MIX1 (1 877-423-6491)

This document is only current as of the last updated date stated below and is valid only for use in the United States. It is important that you always refer to the currently available information at the URL below to provide the most current product information at the time of use. Additional literature such as Contractor Manuals, Technical Bulletins, Detail Drawings and detailing recommendations and other relevant documents are also available on www.gcpat.com. Information found on other websites must not be relied upon, as they may not be up-to-date or applicable to the conditions in your location and we do not accept any responsibility for their content. If there are any conflicts or if you need more information, please contact GCP Customer Service.

Last Updated: 2022-03-25
gcpat.com/about/project-profiles/golden-bay-cement-plant-generates-energy-savings-cba-technology