

Adcor® 500T

Thick sectioned, conformable, hydro-expansive waterstop for preventing saline and brackish water entry through joints in concrete substructures

Product Description

A conformable, swellable polymer/butyl rubber waterstop strip that expands in contact with saline and brackish water. When fully encapsulated by poured concrete, the expansive forces form a seal against concrete faces. The seal resists hydrostatic pressure, stopping water from entering sub-structures

Adcor® 500T is a unique product that has been specifically developed to provide higher performance than conventional bentonite or swellable rubber waterstops. Superior performance arises from:

- controlled, reproducible, volumetric expansion;
- cohesive strength maintained after volumetric expansion;
- malleable and plastic, enabling easy application to a variety of concrete profiles.

Applications

- Horizontal and vertical construction joints in concrete structures
- Casting new concrete against existing
- Floor slabs cast against diaphragm retaining walls, steel sheet piles and secant pile walls.
- Joints between floor slabs and pile caps
- Pipe penetrations through floors and walls

Advantages

- Controlled volumetric expansion – reduces risk of concrete spalling.
- Conformable – can be installed onto a variety of irregular substrates.
- Retains cohesive strength at both original and expanded volume.
- No need for protective steel mesh.
- Resists at least 6 bar (87 psi) hydrostatic pressure.
- Volumetric expansion over 140% in 8% salted water.
- Simple overlap jointing on site.
- Reproducible swell after wet – dry cycling.
- Unaffected by freeze/thaw cycling.


System Components

Adcor 500T
 ¾ x 1 in waterstop strip, supplied in 16 ft rolls.

Supply

Adcor 500T	16 foot rolls 6 rolls/carton 30 cartons/pallet pallet weight 1545 lbs.
-------------------	---

Adcor 500T at floor/wall joint

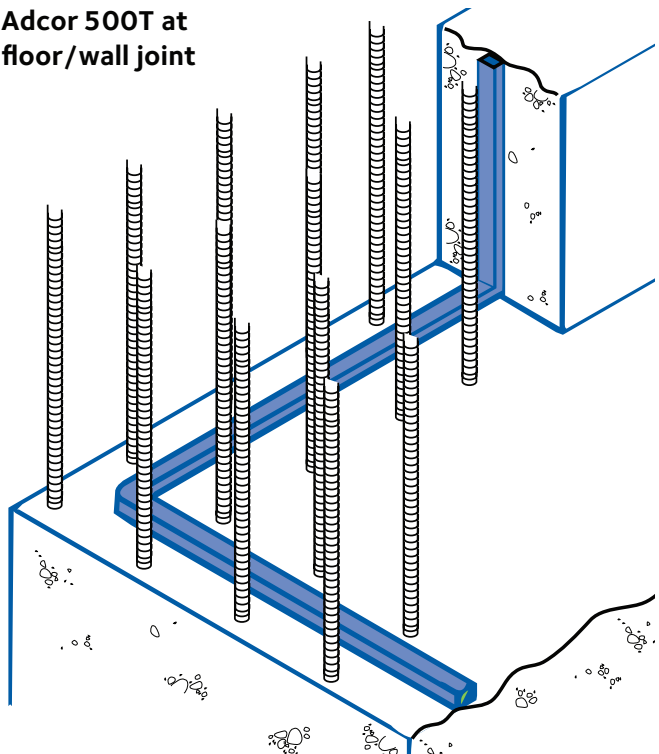

Details shown are typical illustrations only and not working drawings. For assistance with working drawings and additional technical advice please contact GCP Technical Services.

Typical Properties

Property	Typical Value
Profile size	¾ x 1 in
Color	Dark blue
Volumetric expansion in 8% salted water	> 140%
Water pressure resistance	> 6 bar (87 psi)
Density	91 lbs/ft ³
Weight	½ lb/ft
Maximum bend	180 ° at 32 °F
Application temperature range	5 °F to 140 °F
Service temperature range	9 °F to 248 °F
Minimum concrete cover	3 in
Minimum overlap	4 in

Limitations

Not suitable for use in movement joints.

Not suitable for use with pre-cast concrete components.

Design

GCP recommends the use of waterstops in all construction joints subject to hydrostatic pressure. Waterstop networks must be continuous through all joints and penetrations if they are to be effective.

Installation

- Concrete surfaces must be clean and free of all contaminants. Remove all debris and loose concrete.
- On irregular concrete faces gun a ½ in. bead of Adcor Mastic as a bedding material before placement of Adcor 500T.
- Fix Adcor 500T using masonry nails 1½ in. – 2 in. long with a washer ¼ " diameter. Shot fired fixings with ¼ " nuts and ¾ " diameter washers may also be used. Fixings should be spaced at a maximum of 12 in. center.
- All joints should be overlapped 4 in. to ensure full contact between jointed pieces.
- Adcor 500T can be bent around corners, however on complex geometry use a gap filler.
- Any damaged sections should be removed and repaired with a new section of Adcor 500T.
- Keep Adcor 500T dry prior to pouring concrete.

Health and Safety

Read the product label and SDS (Safety Data Sheet) before use. Users must comply with all risk and safety phrases. For health and Safety questions on this product please contact your GCP representative.

gcpat.com | Customer Service: 1-866-333-3726

We hope the information here will be helpful. It is based on data and knowledge considered to be true and accurate, and is offered for consideration, investigation and verification by the user, but we do not warrant the results to be obtained. Please read all statements, recommendations, and suggestions in conjunction with our conditions of sale, which apply to all goods supplied by us. No statement, recommendation, or suggestion is intended for any use that would infringe any patent, copyright, or other third party right.

Darex is a trademark, which may be registered in the United States and/or other countries, of GCP Applied Technologies Inc. This trademark list has been compiled using available published information as of the publication date and may not accurately reflect current trademark ownership or status.

© Copyright 2017 GCP Applied Technologies Inc. All rights reserved.
GCP Applied Technologies Inc., 62 Whittemore Avenue, Cambridge, MA 02140 USA.
In Canada, 294 Clements Road, West, Ajax, Ontario, Canada L1S 3C6.

GCO0083 ADC-007-1217

