

EXTERIOR SHEATHING

REFER TO TECHNICAL LETTER #1 ON CHEMICAL COMPATIBILITY WITH NAILING FLANGE

MECHANICALLY FASTEN AS NECESSARY IN CORNERS THROUGH VYCOR PLUS

SILL PLATE (SEE VCRDET-106 FOR OPTIONS)

VYCOR PLUS


CORNER PATCH (SEE VCRDET-504 FOR OPTIONS)

VYCOR PLUS

DO NOT FLASH OVER BOTTOM NAILING FLANGE

NOTES:

- A. VISIT GCPAT.COM FOR THE MOST CURRENT DETAILS, INSTALLATION VIDEO AND PRODUCT DATA SHEETS
- B. RIPCORD® CAN BE REMOVED FROM VYCOR PLUS FOR EASE OF INSTALLATION
- C. INSTALL VYCOR PLUS IN ORDER AS SHOWN BY NUMBERS
- D. MECHANICALLY FASTEN AS NECESSARY
- E. IF APPLICABLE, LEAVE RELEASE PAPER ON LOWER HALF OF SILL FLASHING UNTIL FUTURE TIE-IN
- F. CHECK LOCAL BUILDING CODES FOR WEATHER RESISTIVE BARRIER REQUIREMENTS AND INSTALL VYCOR PLUS WITH WEATHER RESISTIVE BARRIER TO FORM WATER-SHEDDING LAPS
- G. DETAIL ALSO RELEVANT FOR VYCOR V40 AND BUTYL

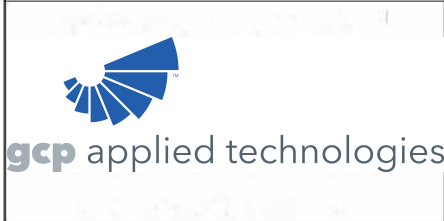

HALF ROUND WINDOW - OPTION 2
SEVERE EXPOSURE
VYCOR® PLUS SELF-ADHERED FLASHING

Drawing: VCRDET-105
Scale: Not to scale
Effective Date: 01/31/07
Supersedes: 09/01/05