



We've Got You Covered **WEATHER OR NOT**



People. Performance. Protection.

Table of Contents

UNDERLAYMENT AND FLASHING COMPARISON.....	4
UNDERLAYMENT.....	5
GRACE ULTRA™	6-7
GRACE ICE & WATER SHIELD® HT	8-9
GRACE ICE & WATER SHIELD®	10-11
GRACE SELECT™	12-13
TRI-FLEX® XT	14-15
WEATHER RESISTIVE BARRIER	16
VYCOR® enV-S™	17-18
FLASHING	19
VYCOR® PRO	20-21
VYCOR® PLUS	22-23
TAPES & ACCESSORIES	24
ROOF DETAIL MEMBRANE	25
VYCORNER®	26
PRODUCT DIMENSIONS	27



We've Got You Covered
WEATHER OR NOT



Underlayment and Flashing Comparison

Self-Adhered Smooth Surface Underlayments				Synthetic Underlayment
GRACE ULTRA™	GRACE ICE & WATER SHIELD® HT	GRACE ICE & WATER SHIELD®	GRACE SELECT™	TRI-FLEX® XT
Designed for Extreme Temperature Roof Assemblies	Meets the Challenges Inherent in Metal Roofs	The Original, Best in Class Underlayment	The Performance Alternative to Granulars	Premium Performance Synthetic Underlayment
120 days	120 days	90 days	30 days	180 days
198 SF Rolls	200 SF Rolls 225 SF Rolls	108 SF Rolls 200 SF Rolls 225 SF Rolls	195 SF Rolls	1000 SF Rolls

Flashing	
VYCOR® PRO	VYCOR® PLUS
Self-adhered flashing with a butyl-modified adhesive	Self-adhered flashing with a rubberized asphalt adhesive
120 days	30 days
4", 6", 9" and 12"	4", 6", 9", 12", 18" and 36"

Roofing Underlayment

GRACE ULTRA™

Designed for extreme temperature roof assemblies

- 100% Butyl Adhesive provides excellent thermal stability up to 300°F
- Ideal for use on Copper, Zinc, or COR-TEN® roofs
- Strong adhesion to the roof deck, fasteners, and itself
- Great on both low and steep slope applications
- Compatible with EPDM and TPO roofing materials

Exposure	Sizes	Code Approvals
120 days	196 SF Rolls	ASTM E 108/UL790 Class A under fiber-glass; Class C under organic felt

[Table of Contents](#)





GRACE ICE & WATER SHIELD® HT

Meets the challenges inherent in metal roofs

- Excellent thermal stability up to 260F
- Strong adhesion to the roof deck
- High quality seal around roofing fasteners
- Forms watertight laps
- RIPCORD® Split Release for an easier install

Exposure	Sizes	Code Approvals
120 days	200 SF Rolls 225 SF Rolls	ASTM E 108/UL790: Class A under fiber-glass; Class C under organic felt NOA #15-0728.09 No. 289-R5 No. 13671-L

[Table of Contents](#)





GRACE ICE & WATER SHIELD®

The original, best in class underlayment

- Strong adhesion to the roof deck
- High quality seal around roofing fasteners
- Forms watertight laps
- RIPCORD® Split Release for an easier install

Exposure	Sizes	Code Approvals
90 days	108 SF Rolls 200 SF Rolls 225 SF Rolls	ASTM E 108/UL790: Class A under fiber-glass; Class C under organic felt NOA #19-0207.05 No. 289-R5 CCMC No. 13670-L ICC AC-188: RR25330

[Table of Contents](#)





GRACE SELECT™

The performance alternative to granulars

- Lightweight
- Great adhesion to roof deck
- Seals around fasteners
- Better lap adhesion than most granular products
- RIPCORDER® Split Release for an easier install

Exposure	Sizes	Code Approvals
30 days	195 SF Rolls	ASTM E 108/UL790: Class A under fiber-glass; Class C under organic felt

[Table of Contents](#)





GRACE

GRACE
select

GRACE
select


TRI-FLEX® XT

Premium performance synthetic underlayment

- 20 times stronger than traditional #30 felt
- 5 times more coverage per roll than traditional #30 felt
- Remarkable foot traction
- Durable
- Lightweight weight

Exposure	Sizes	Code Approvals
180 days	1,000 SF Rolls	ASTM E 108/UL790: Class A under fiber-glass; Class C under organic felt

[Table of Contents](#)

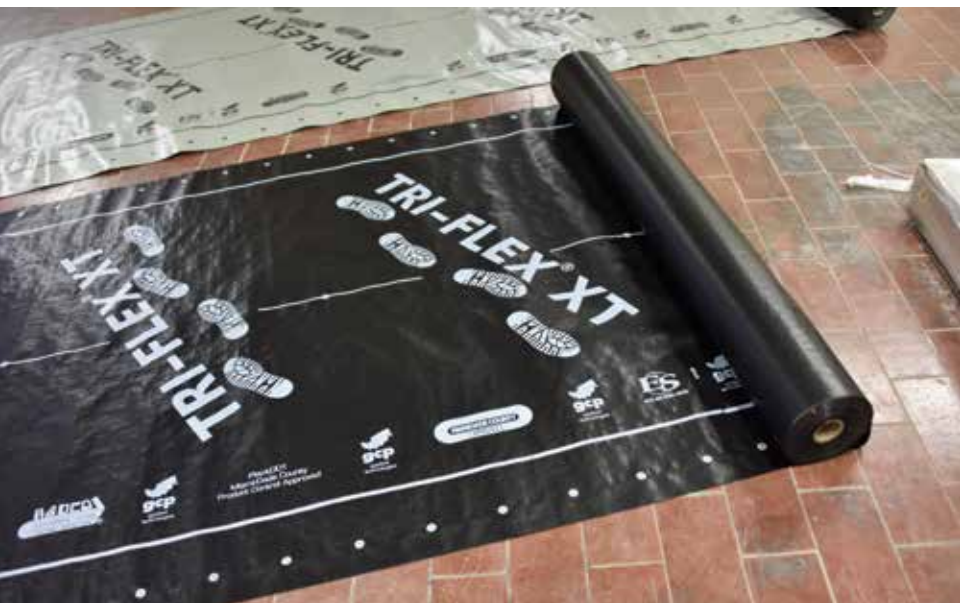



Weather Resistive Barrier

VYCOR[®] enV-S[™]

The next generation of housewrap

- Excellent, primerless adhesion to plywood and OSB
- Durable protection against air leakage, wind driven rain, and water intrusion
- Breathable to promote healthy air flow
- Seals around siding fasteners to help prevent leak paths
- Fast and easy to install
- Convenient split release liner

Exposure	Sizes	Code Approvals
90 days	400 SF Rolls	AC-38 Acceptance Criteria as a Weather Resistive Barrier and Air Barrier

[Table of Contents](#)





Flashing

VYCOR® PRO

Self-adhered flashing with butyl-modified adhesive

- Wide application temperature 25°F to 176°F
- 4x the exposure of VYCOR® Plus
- Ideal for windows, doors, and detail areas
- Excellent adhesion for watertight seams
- Seals around fasteners

Exposure	Sizes
120 days	4", 6", 9", and 12"

[Table of Contents](#)



VYCOR® PRO

VYCOR

VYCOR® PRO

VYCOR® PRO

VYCOR® PRO

VYCOR[®] PLUS

Rubberized asphalt adhesive

- Ideal for windows, doors, and other detail areas
- RIPCORDER[®] split release for an easy install
- Excellent adhesion for watertight seams
- Seals around fasteners
- Measurement markings

Exposure	Sizes
30 days	4", 6", 9", 12", and 18"

[Table of Contents](#)



VYCOR® PLUS

VYCOR® PLUS

VYCOR® PLUS

DR-PLUS

VYCOR® PLUS

VYCOR® PLUS

VYCOR® PLUS

VYCOR® PLUS

VYCOR® PLUS

VYCOR® PLUS

VYCOR® PLUS

VYCOR® PLUS

VYCOR® PLUS

VYCOR® PLUS

Tapes & Accessories

ROOF DETAIL MEMBRANE

Rubberized asphalt adhesive

- Great for use on valleys, skylights, chimneys and roof to wall transitions
- Excellent adhesion to roof deck, fasteners, and itself
- RIPCORDER® split release for an easier install

Exposure	Sizes
90 days	4", 9", and 18"

[Table of Contents](#)



VYCORNER®

Window corner detail solution

- Fast and easy flashing installation
- Excellent protection against leaks

Exposure	Sizes
n/a	50 per carton

[Table of Contents](#)



Product Dimensions

PRODUCT	ROLL WIDTH	COVERAGE/ UNIT	UNIT (S)/ CARTON	CARTONS PALLET	WEIGHT/ PALLET	CARTONS/ TRUCK
GRACE ULTRA™	34 in.	198 SF	1	25	1080 lbs	1000
GRACE ICE & WATER SHIELD®	36 in.	108 SF	1	25	880 lbs	1200
	36 in.	200 SF	1	35	1955 lbs	700
	36 in.	225 SF	1	35	2200 lbs	700
GRACE ICE & WATER SHIELD® HT	36 in.	200 SF	1	35	1955 lbs	700
	36 in.	225 SF	1	35	2200 lbs	700
GRACE SELECT™	36 in.	195 SF	1	25	850 lbs	1200
TRI-FLEX® XT	48 in.	1000 SF	1	25	965 lbs	1400
VYCOR® enV-S™	40 in.	400 SF	1	42	1145 lbs	1680
VYCOR® PLUS	36 in.*	225 SF	1	25	945 lbs	1200
	18 in.*	112 SF	2	25	945 lbs	2400
	12 in.	75 SF	6	30	2200 lbs	3600
	9 in.	56 SF	6	30	1680 lbs	3960
	6 in.	37 SF	12	30	2200 lbs	7200
	4 in.	25 SF	18	30	2200 lbs	10800
VYCOR® PRO	12 in.	75 SF	4	30	2200 lbs	4800
	9 in.	56 SF	4	30	1680 lbs	4800
	6 in.	37 SF	8	30	2200 lbs	9600
	4 in.	25 SF	12	30	2200 lbs	14400
ROOF DETAIL MEMBRANE	18 in.	75 SF	1	50	1000 lbs	2000
	9 in.	37 SF	6	30	1700 lbs	3600
	4 in.	16 SF	18	30	2200 lbs	n/a
VYCORNER®	n/a	1 corner	50	192	3.8 lbs	n/a

*Indicates bulk shipping option

[Table of Contents](#)

GCP Applied Technologies, ULTRA, GRACE ICE & WATERSHIELD, SELECT, TRI-FLEX, VYCOR enV-S, and VYCOR are trademarks which may be registered in the United States and/or other countries, of GCP Applied Technologies Inc. This trademark list has been compiled using available published information as of the publication date and may not accurately reflect current trademark ownership or status. These products may be covered by patents or patents pending.

© Copyright 2020 GCP Applied Technologies Inc. All rights reserved.
RE0146 Residential Sample Book | WPS-004-0920

GCP Applied Technologies Inc., 62 Whittemore Avenue, Cambridge, MA 02140 USA.

