


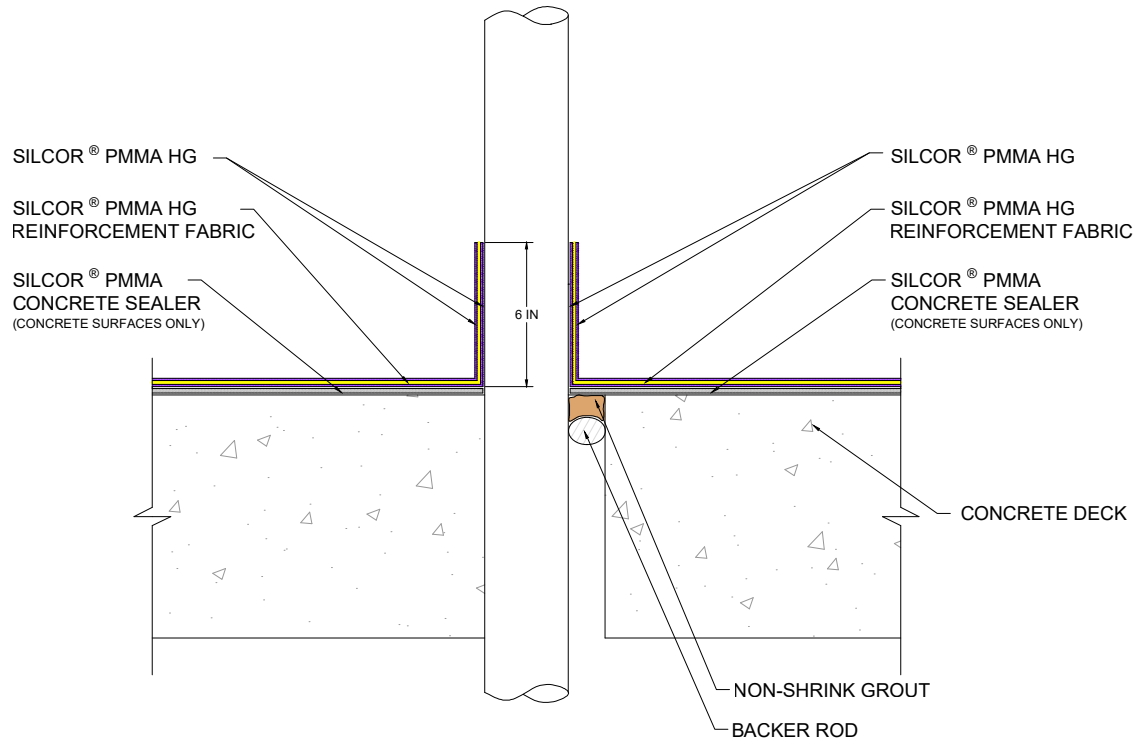

NOTES:

- A. GROUT PENETRATION TO PREVENT MOVEMENT WHICH MAY COMPROMISE THE WATERPROOFING INTEGRITY
- B. SILCOR® PMMA CONCRETE SEALER WITH QUARTZ SAND BROADCAST
- C. PENETRATION MUST BE FREE OF CONNECTIONS, OBSTRUCTIONS, SUPPORTS WITHIN THE DETAILING AREA. PENETRATIONS MUST ALSO BE ABRADED TO MAXIMIZE ADHESION OF THE SYSTEM
- D. REFER TO PRODUCT DATA SHEETS FOR ADDITIONAL APPLICATION INSTRUCTIONS