


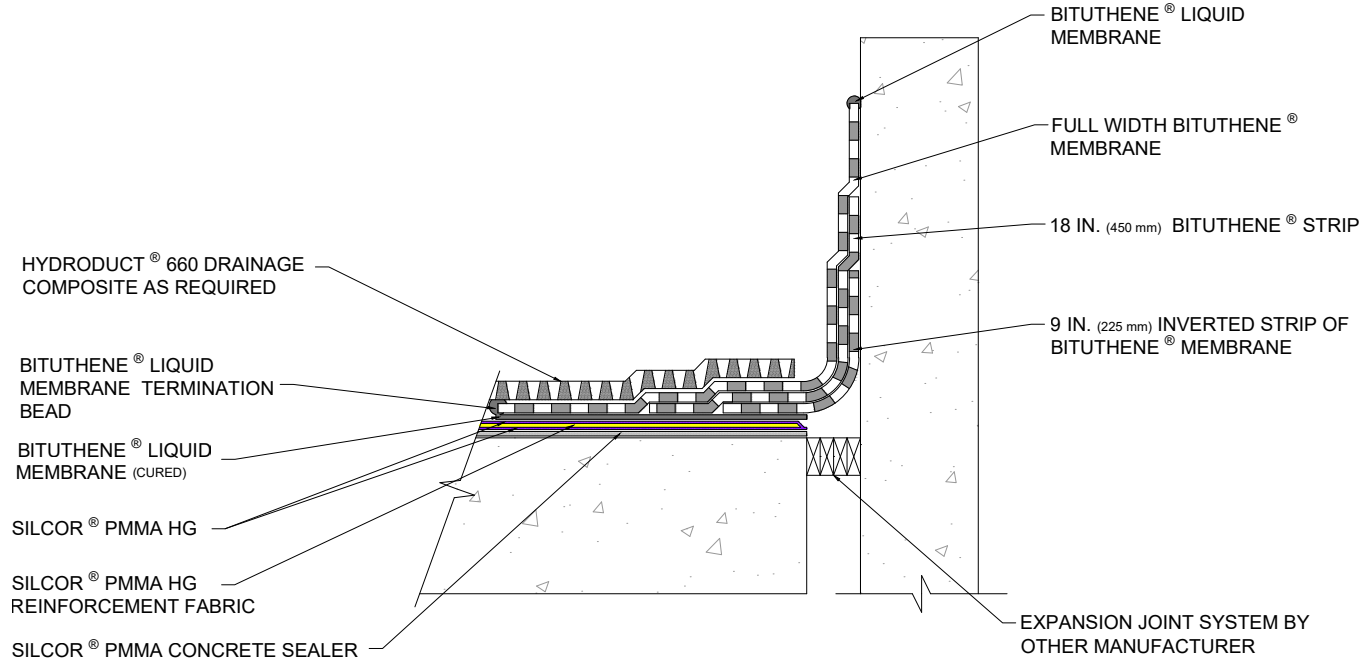

- NOTES:
- FOR JOINT WIDTHS UP TO 2 IN. (50 mm) WITH A MAXIMUM OF 1 IN. (25 mm) MOVEMENT. IF EXPECTED MOVEMENT IS LESS THAN 0.5 IN. (15 mm) A 6 in. (150 mm) INVERTED STRIP IS ACCEPTABLE
 - A WATERPROOF EXPANSION JOINT SYSTEM BY OTHERS MUST BE SELECTED FOR THE WIDTH AND EXPECTED MOVEMENT OF THE JOINT, SEE TECHNICAL LETTER 11 FOR ADDITIONAL INFORMATION.
 - PMMA SURFACE MUST BE ABRADED AND ACETONE WIPED CLEAN PRIOR TO BITUTHENE INSTALLATION