



TB-0005B — Mortar Joints and the DRY-BLOCK[®] System

Mortar joints in masonry construction can account for up to 15% of the surface area of a wall. To maximize water repellency, selecting a weather-resistant mortar joint profile is an important design consideration. Below are a few common mortar joint profiles. For exterior DRY-BLOCK[®] applications a “V” or Concave profile results in a well-compacted joint and is strongly recommended. Weathered, flush, raked, struck, beaded, or weeped joint profiles provide poor water resistance and are not recommended for exterior applications.

When tooling a joint the mortar should be thumbprint hard. A joint is thumbprint hard when it will retain the imprint of a thumb. This will aid in developing a smooth dense surface, create intimate contact between the mortar and the adjacent masonry unit and reduce the potential for hairline cracks.

Since DRY-BLOCK provides water repellent properties to cured mortar, premature drying of the mortar will activate these properties and subsequent hydration will be hindered. Proper curing and construction techniques can be found in technical literature published by the National Concrete Masonry Association (www.ncma.org).

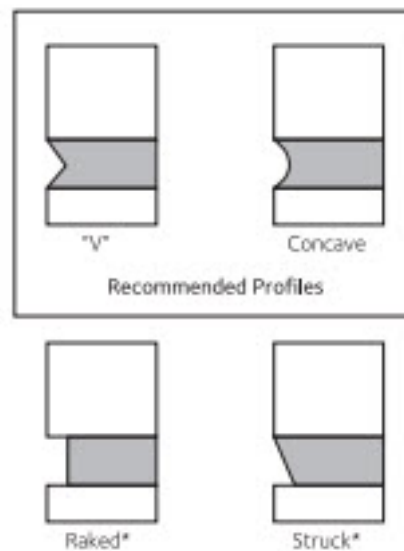

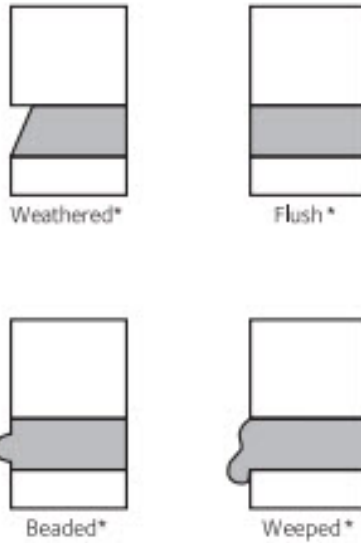

* Not recommended for exterior use.

gcpat.com | North America Customer Service: 1 877-4AD-MIX1 (1 877-423-6491)

We hope the information here will be helpful. It is based on data and knowledge considered to be true and accurate and is offered for consideration, investigation and verification by the user, but we do not warrant the results to be obtained. Please read all statements, recommendations and suggestions in conjunction with our conditions of sale, which apply to all goods supplied by us. No statement, recommendation, or suggestion is intended for any use that would infringe any patent, copyright, or other third party right.

Strux is a trademark, which may be registered in the United States and/or other countries, of GCP Applied Technologies Inc. This trademark list has been compiled using available published information as of the publication date and may not accurately reflect current trademark ownership or status.

© Copyright 2018 GCP Applied Technologies Inc.

All rights reserved. GCP Applied Technologies Inc., 62 Whittemore Avenue, Cambridge, MA 02140 USA. In Canada, 294 Clements Road, West, Ajax, Ontario, Canada L1S 3C6

This document is only current as of the last updated date stated below and is valid only for use in the United States. It is important that you always refer to the currently available information at the URL below to provide the most current product information at the time of use. Additional literature such as Contractor Manuals, Technical Bulletins, Detail Drawings and detailing recommendations and other relevant documents are also available on www.gcpat.com. Information found on other websites must not be relied upon, as they may not be up-to-date or applicable to the conditions in your location and we do not accept any responsibility for their content. If there are any conflicts or if you need more information, please contact GCP Customer Service.

Last Updated: 2018-12-28

gcpat.com/solutions/products/masonry-hardscape-solutions/tb-0005b-mortar-joints-and-dry-block-system